

► HIGH POWER LED GARDEN LIGHT



83512

83512+antiglare hood

LED Colour Temperature	optics
• 2700K • 3000K	• 8°/15°/20°/30°/45°/60°/90°
• 4000K • 6000K	

Housing color option

Aluminum anodized	Silver painting PAL9006
Matt black PAL9005	


Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Life cycle
83311 83511	1x1W	8°/15°/20°/30°/45°/60°	1.1	DC12V/DC24V	02
83311H 83511H	1x1W	8°/15°/20°/30°/45°/60°	1.3	AC120V/AC240V	02
83312 83512	1x2W	8°/15°/20°/30°/45°/60°	2.2	DC12V/DC24V	02
83312H 83512H	1x2W	8°/15°/20°/30°/45°/60°	2.6	AC120V/AC240V	02
83316 83516	1x3W RGB3in1	30°/45°/60°	3.2	DC12V/DC24V	02

Optional accessories



Outer Dimensions

Unit:mm

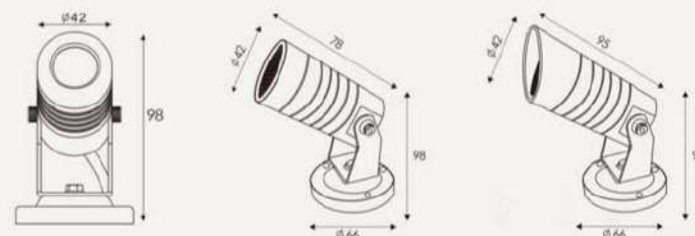

Material specifications

Housing&face cover	Aluminum anodized finishing or powder painting
Glass	Tempered glass,1-3mm
Lens	Optical lens, efficiency>85%
Cable gland	Copper and nickel coated
Gasket	Teeding shaped seal
LED	SMD LED
PCB	Excellent heat conductivity aluminum, coefficient of Heat Conductivity220w/mk
Driver	Constant current output single color LED=1-circuit output RGB 3in1 LED=3-circuit output
Operating temperature	-20°C~40°C
Power cable	H05RN-F 2x0.75mm², L=1m(low voltage) H05RN-F 3x0.75mm², L=1m(high voltage) H05RN-F 4x0.75mm², L=1m(for RGB)

