

► **HIGH POWER LED Landscape Light**
► **LED Garden Spot Light**



8355XB



8355X


LED Colour Temperature	optics
• 2700K • 3000K	• 8°/15°/25°/30°/45°/60°/90°
• 4000K • 6000K	

Housing color option

Grey painting RAL9007	Silver painting RAL9006
Matt black RAL9005	

Material specifications

Housing	12# Die-casting outdoor powder coated aluminum T=60-80um.
Glass	Tempered glass T=4mm
Lens	Optical lens efficiency 95%
Cable gland	IP68 PG-9 copper and nickel coated
Gasket	Molding shaped silicone double seal
LED	CREE XP-E LED/EDISON LED
PCB	Excellent heat conductivity aluminum coefficient of Heat conductivity 22.0w/mk
Driver	Constant current output Single color LED=1 circuit output RGB 3in1 LED=3 circuit output
Operating temperature	-20°C-40°C
Power cable	H05RN-F 2x0.75mm² L=1m (low voltage) H05RN-F 3x0.75mm² L=1m (high voltage) H05RN-F 4x0.75mm² L=1m (for RGB)
Spike	PVC
Mounting base	Powder coated die-casting aluminum

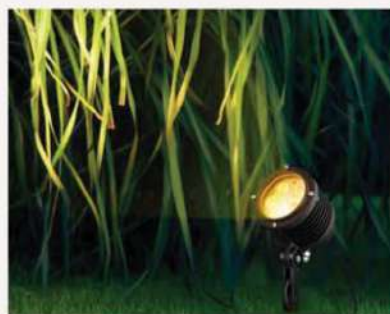

► **GU10&MR16&E27**
Changeable Socket spot light




835110B



835110BD

Outer Dimensions

Unit:mm

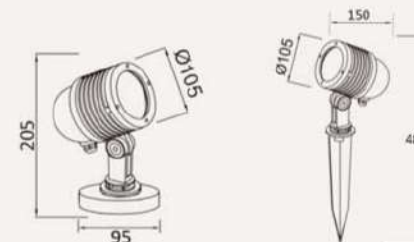

Input voltage is according to LED bulb spec

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
83551 83551B	5x1W	8°/15°/20°/30°/45°/60°	5.3	DC24V	05
83551H 83551BH	5x1W	8°/15°/20°/30°/45°/60°	6.1	AC120V/AC240V	05
83552 83552B	5x2W	8°/15°/20°/30°/45°/60°	10.4	DC24V	05
83552H 83552BH	5x2W	8°/15°/20°/30°/45°/60°	12.5	AC120V/AC240V	05
83556 83556B	5x3W RGB3in1	30°/45°/60°	15.1	DC24V	05
83559 83559B	5x4W RGBW4in1	8°/15°/25°/30°/45°/60°	20.2	DC24V	05
835110B 835110BD	GU10/ E27/ MR16 socket	N/A	N/A	N/A	05