



► RGBW 4in1 LED Garden Spot Light



Outer Dimensions Unit:mm

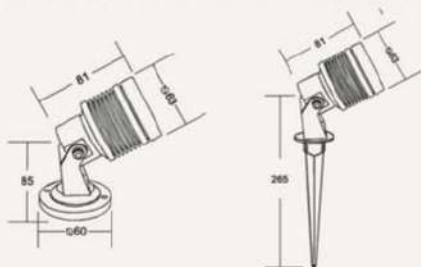


Material specifications

Housing	Aluminum anodized finishing & powder painting
Glass	Tempered glass, T=3mm
Lens	Optical lens, efficiency>85%
Cable gland	Copper and nickel coated
Gasket	Tooling shaped seal
LED	RGBW4in1 LED
Driver	Constant current output
Spike	PVC(grey or black)
Mounting base	Aluminum anodized finishing or powder painting
Power cable	HO3RN4F 5x0.5mm² L=1m(low voltage)



► RGBW 4in1 LED Landscape Light

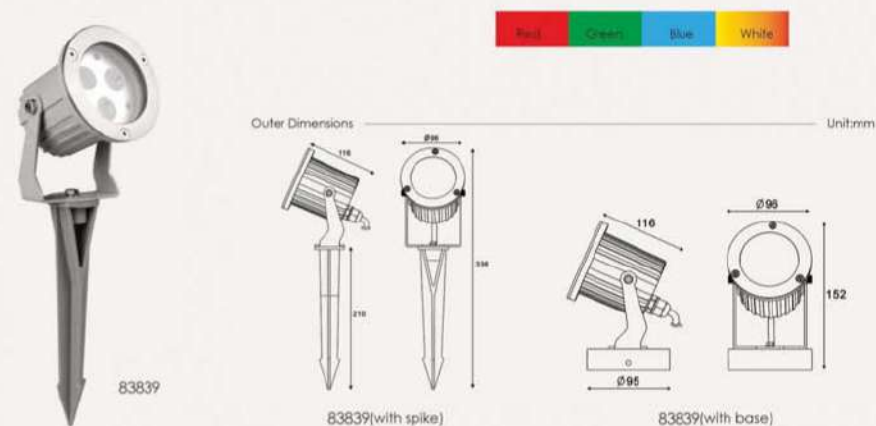

Material specifications

Housing	12#Die-casting powder coated aluminum, T=40-80um Adhesion of ISO class I / ASTM class 4B
Baricover	Stainless steel SUS 304 or 316
Bracket	Powder coated aluminum
Glass	Tempered glass, T=4mm
Lens	Optical lens, efficiency>85%
Cable gland	IP-67 PG-9 PVC
Gasket	Molding shaped silicone double seal
Power cable	HO3RN-F5x0.75mm² L=1m
Spike	PVC(grey or black)
Mounting base	Powder coated die-casting aluminum



Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
B833109 B835109	1x10W RGBW4in1 (W=3000/4000/6000K)	24°/36°/60°/10x30°	10.2	DC12V/DC24V	04
835120	1x 6W RGBW4in1 (W=3000/4000/6000K)	24°/36°/60°/10x30°	10.2	DC12V/DC24V	04
83839	3x4W RGBW4in1 (W=3000/4000/6000K)	30°/45°/60°	13.2	DC24V	04