

## PRODUCT DETAILS

### Led Waterproof Panel Light

*Model No: IL-PLS6060-40W*

*Model No: IL-PLS15120-36W*

*Model No: IL-PLS30120-48W*

*Model No: IL-PLS60120-72W*

### RECESSED TYPE AND SURFACE TYPE

#### APPLICATION:

*PARKING, GARAGES, MALLS  
OUTDOOR AREA*

#### AVAILABLE WATTAGES



*40W, 36W, 48W AND 72W*

#### COLOR TEMPERATURES

*2700K, 3000K, 4000K AND  
6000K*



## PRODUCT SPECIFICATION

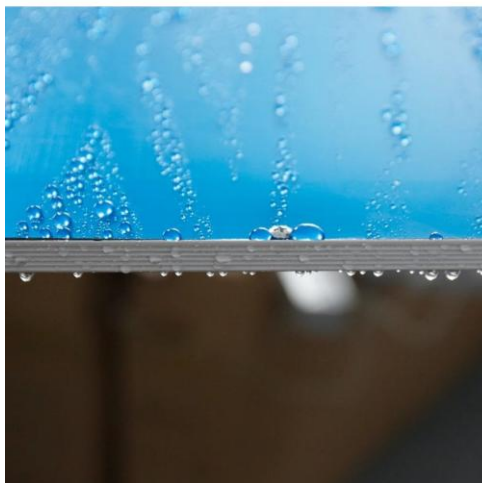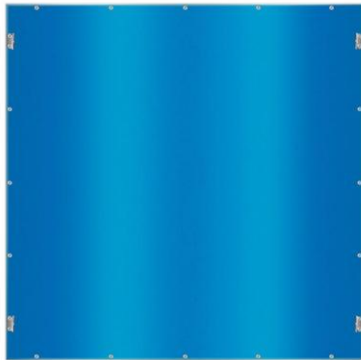


### Quick Details

Model No.	<b>SL-PLS6060-40W</b>	Input Vol.	AC 220-240V/ AC100-277V
Product size	600x600x9 mm	Installation	Suspending/Recessed without spring
Power	40W	PF	>0.9
Lumens	4000lm	CCT	2700-6500K option
IP Rating	IP65	Warranty (Years)	3/5 years
Material	6063AL+PC	Customized	/



### Quick Details


Model No.	<b>SL-PLS15120-36W</b>	Input Vol.	AC 220-240V/ AC100-277V
Product size	150*1200*9 mm	Installation	Suspending/Recessed without spring
Power	36W	PF	>0.9
Lumens	3600lm	CCT	2700-6500K option
IP Rating	IP65	Warranty (Years)	5 years
Material	6063AL+PC	Customized	/
Model No.	<b>SL-PLS30120-40W</b>	Input Vol.	AC 220-240V/ AC100-277V
Product size	300*1200*9 mm	Installation	Suspending/Recessed without spring
Power	48W	PF	>0.9
Lumens	4000lm	CCT	2700-6500K option
IP Rating	IP65	Warranty (Years)	5 years
Material	6063AL+PC	Customized	/
Model No.	<b>SL-PLS60120-72W</b>	Input Vol.	AC 220-240V/ AC100-277V
Product size	600*1200*9 mm	Installation	Suspending/Recessed without spring
Power	72W	PF	>0.9
Lumens	7200lm	CCT	2700-6500K option
IP Rating	IP65	Warranty (Years)	5 years
Material	6063AL+PC	Customized	/

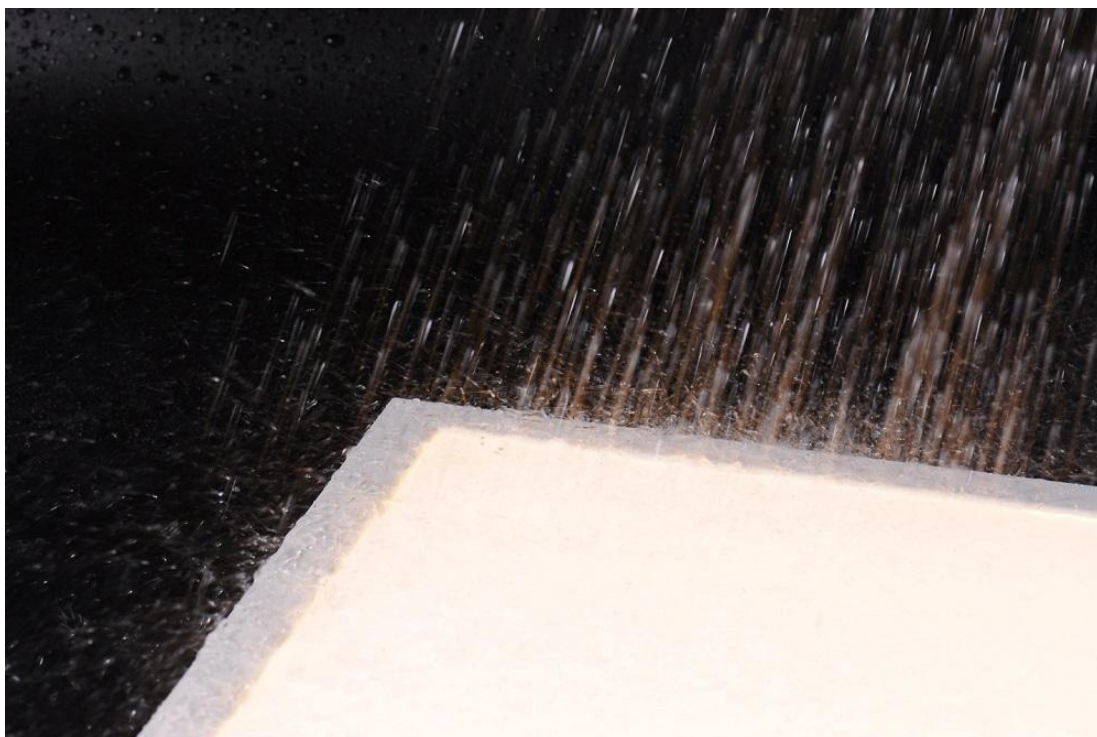

### Features:

- (1) **Side-lit light technology:** Side plate and Diffuser plate of to maintain a 9mm distance which is to avoid the phenomenon of the shadow.
- (2) **Aluminum housing:** Aluminum frames made from the strong anodizing aluminum profiles, high corrosion resistance, and high heat dissipation.
- (3) **Energy and cost saving:** It is saving 90% power compared with ordinary pendant light.
- (4) **Eco-friendly:** no ultraviolet and infrared radiation, no electromagnetic.
- (5) **High Electricity Utilization:** high photoelectric conversion rate.
- (6) **High Security Performance:** with constant gentle current, fast start, low voltage, low power consumption.
- (7) **Eye Protect:** no strobe flash, high color rendering, no felling tired even after long-term using eye.
- (8) **Professional Customization:** freely choose the specification what you like.
- (9) **Ultra-bright & energy efficient:** 100-120lm/w high output, much brighter than fluorescent, save more money on your energy bill.
- (10) **Long lifespan:** 50000hrs, 5 times longer than fluorescent, reduce your replacement frequency and maintenance cost. 5 years Warranty.
- (11) **LED Panel Performance Series** is designed to lay in drop ceiling in offices, school and healthcare applications. The design of the panels produces an even, consistent shadow less light. The LEDs enable long life, high lumen maintenance, high CRI and they are low maintenance and constructed without hazardous materials.



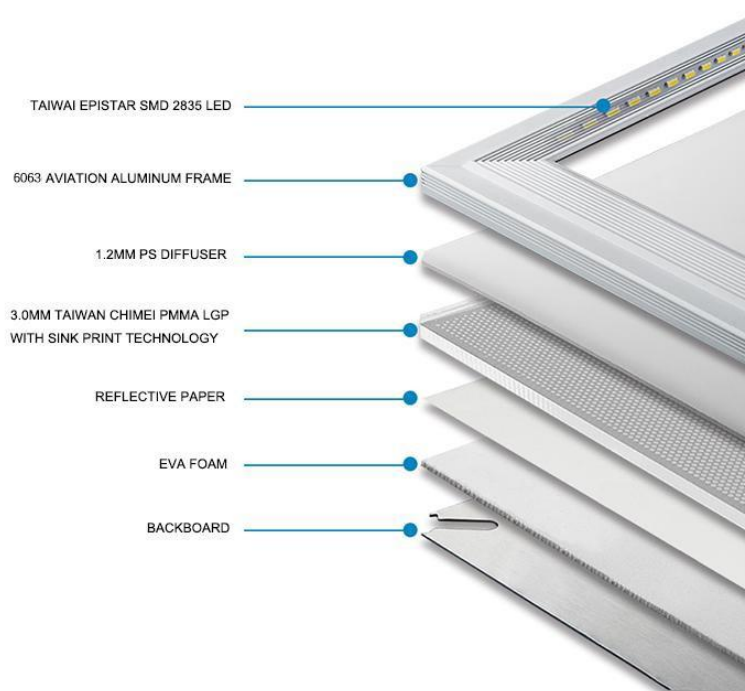

### Packaging information:

Model	Inner Carton Size (L*W*H cm)	Outer carton Size (L*W*H cm)	N.W. (kg)	G.W. (kg)	QTY/CTN (pcs)	20' GP (pcs)
SL-PLS6060-40W	-	64*17*66 cm	3.9kg	21kg	5pcs	1800pcs
SL-PLS15120-36W	-	125*18*34.5cm	1.8kg	19.5kg	10pcs	3300pcs
SL-PLS30120-48W	-	125*18*34.5cm	4.3kg	23.5kg	5pcs	1480pcs
SL-PLS60120-72W	-	125*8*66cm	8.8kg	19kg	2pcs	780pcs



Remark: The above packing information is only for reference.  
The platform or the plywood frame will be additional charged as per the package.

**For more detail information, please contact our Sales Representative. Thanks for your attention.**