



● Bevel



Parameter

220-240V,
CRI 80/90,
3000K/4000K/6000K
Beam Angle
lens :10°/15°/24°/
36°/50°
reflector: 20°/40°/60°
IP65

Item No	Dimension(mm)	Cut out(mm)	Power
Z020127-9A	φ65*H57	φ55	9W
Z020127-9B	φ80*H57	φ 5	9W
Z020127-18A	φ85*H78.8	0	18W
Z020127-18B	φ100*H78.8	φ75 φ 7	18W

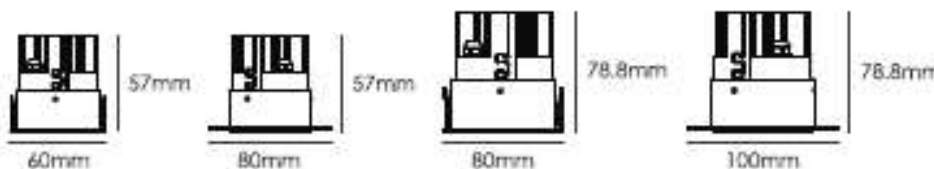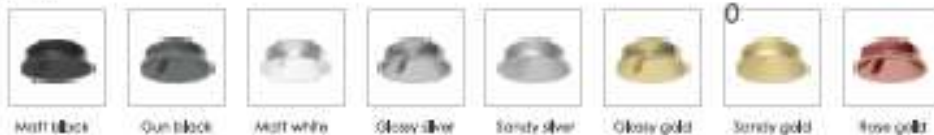

● Trumpet



Parameter

220-240V,
CRI 80/90,
3000K/4000K/6000K
Beam Angle
lens :10°/15°/24°/
36°/50°
reflector: 20°/40°/60°
IP65

Item No	Dimension(mm)	Cut out(mm)	Power
Z020127-9C	φ65*H57	φ55	9W
Z020127-9D	φ80*H57	φ 5	9W
Z020127-18C	φ85*H78.8	0	18W
Z020127-18D	φ100*H78.8	φ75 φ 7	18W

