


● Round hole



Parameter	Item No	Dimension(mm)	Cut out(mm)	Power
220-240V, CRI 80/90, 3000K/4000K/6000K Beam Angle Lens :10°/15°/24°/ 36°/50° reflector: 20°/40°/60° IP65	Z020127-9E	φ65*H57	φ 5	9W
	Z020127-9F	φ80*H57	5	9W
	Z020127-18E	φ85*H78.8	φ 5	18W
	Z020127-18F	φ100*H78.8	0	18W
			φ75 φ 7 0	

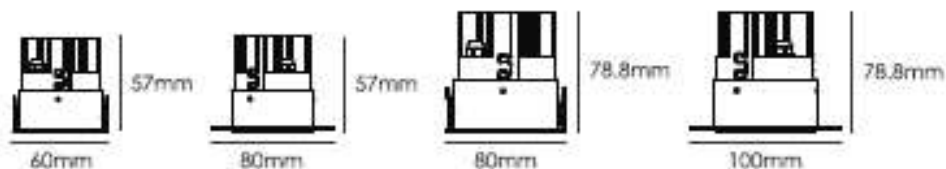

● Oval



Parameter	Item No	Dimension(mm)	Cut out(mm)	Power
220-240V, CRI 80/90, 3000K/4000K/6000K Beam Angle Lens :10°/15°/24°/ 36°/50° reflector: 20°/40°/60° IP65	Z020127-9G	φ65*H57	φ 5	9W
	Z020127-9H	φ80*H57	5	9W
	Z020127-18G	φ85*H78.8	φ 5	18W
	Z020127-18H	φ100*H78.8	0	18W
			φ75 φ 7 0	

