


● Acrylic flat



Parameter	Item No	Dimension(mm)	Cut out(mm)	Power
220-240V, CRI 80/90, 3000K/4000K/6000K Beam Angle	Z020127-9J	φ65*H66	φ55	9W
	Z020127-9K	φ80*H66	φ 5	9W
lens :10°/15°/24°/ 36°/50°	Z020127-18J	φ85*H90.8	0	18W
reflector: 20°/40°/60° IP65	Z020127-18K	φ100*H90.8	φ75 φ 7 0	18W

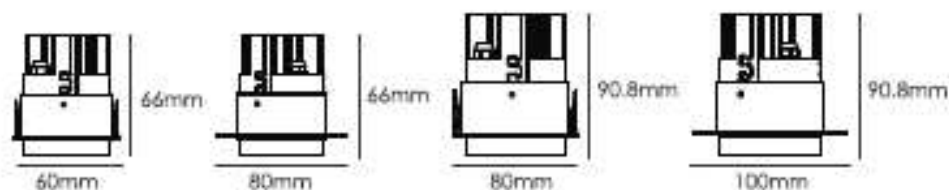

● Acrylic flat trumpet



Parameter	Item No	Dimension(mm)	Cut out(mm)	Power
220-240V, CRI 80/90, 3000K/4000K/6000K Beam Angle	Z020127-9L	φ65*H66	φ55	9W
	Z020127-9M	φ80*H66	φ 5	9W
lens :10°/15°/24°/ 36°/50°	Z020127-18L	φ85*H90.8	0	18W
reflector: 20°/40°/60° IP65	Z020127-18M	φ100*H90.8	φ75 φ 7 0	18W

