


● Acrylic bevel



Parameter	Item No	Dimension(mm)	Cut out(mm)	Power
220-240V, CRI 80/90, 3000K/4000K/6000K	Z020127-9N	φ65*H66	φ55	9W
Beam Angle	Z020127-9P	φ80*H66	φ 5	9W
lens :10°/15°/24°/ 36°/50°	Z020127-18N	φ85*H90.8	0	18W
reflector: 20°/40°/60° IP65	Z020127-18P	φ100*H90.8	φ75 φ 7 0	18W

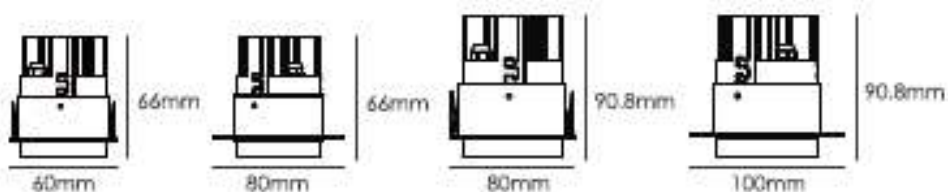

● Acrylic cylinder



Parameter	Item No	Dimension(mm)	Cut out(mm)	Power
220-240V, CRI 80/90, 3000K/4000K/6000K	Z020127-9Q	φ65*H118	φ55	9W
Beam Angle	Z020127-9R	φ80*H118	φ 5	9W
lens :10°/15°/24°/ 36°/50°	Z020127-18Q	φ85*H180	0	18W
reflector: 20°/40°/60° IP65	Z020127-18R	φ100*H180	φ75 φ 7 0	18W

