




ROSE RGBW
LT-SL2.0-RGBW-512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.





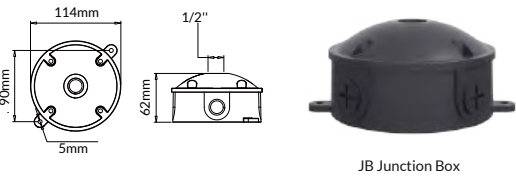

Technical features					
IP 66	IK 08	CE	CB	5 YEARS	III
DMX512					

Technical data	
Wattage	12W
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	3x 3535LED CRI>80
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply DC 24V
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W	396.0	33.00	15°
			24°
			36°
			60°
			40*70°

Finish color options :

-  Textured Grey RAL 9006
-  Anthracite Grey RAL7024
-  Matt Black (onrequest)
-  Bronze RAL8019

Customizable in different finishing colors

