




ROSE

LT-SL2.4

Luminaire Suitable For Pole Mounting In Single Or Multiple Combinations

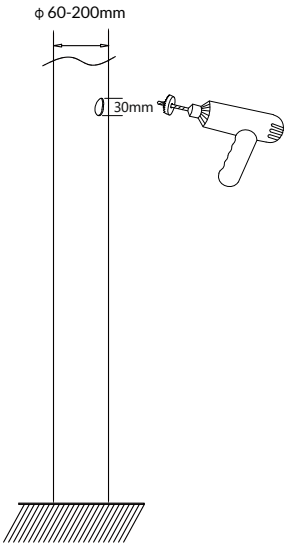

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

*Can be drilled on-site, ϕ 30mm, flexible combination.

Technical features

IP 66	IK 08	CE	CB	5 YEARS	⚡
-------	-------	----	----	---------	---

Technical data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg



Coupler

Suitable to be used with poles diam. min 60 mm and diam. max 200 mm. Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho chromatised and polyester powder coated dia-cast copper-free aluminum material.

