

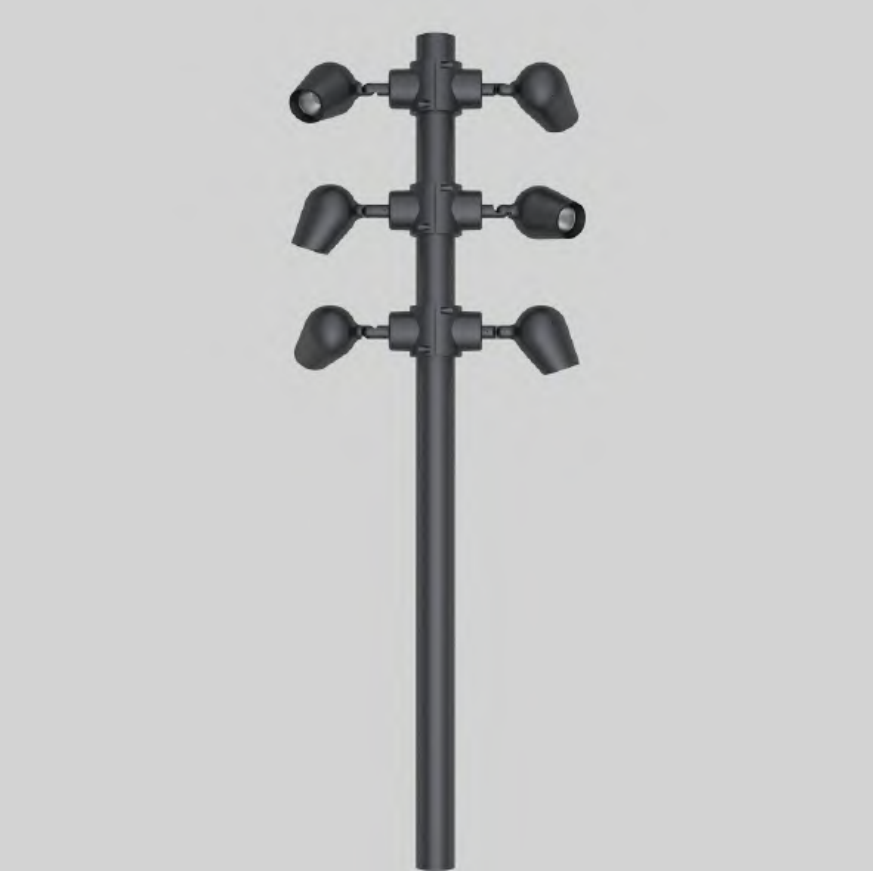


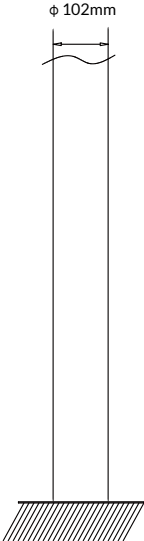

# ROSE Pro

## LT-SL3.6

Flange installation



| light source*                            | lumen output (lm) | lumin. efficacy (lm/w) | light beam options |
|------------------------------------------|-------------------|------------------------|--------------------|
| 3000°K warm-white                        |                   |                        |                    |
| 30W COB                                  | 3000.0            | 100.00                 | 15°                |
| 40W COB                                  | 4000.0            |                        | 24°                |
| 60W COB                                  | 6000.0            |                        | 36°                |
|                                          |                   |                        | 60°                |
|                                          |                   |                        | 40°70°             |
| 2700/4000/5000K CCT available on request |                   |                        |                    |

Finish color options :

-  Textured Grey RAL 9006
-  Anthracite Grey RAL7024
-  Matt Black (onrequest)
-  Bronze RAL8019

Customizable in different finishing colors

Technical features

IP 66

IK 08

CE

CB

5 YEARS



Technical data

|                |                                                                              |
|----------------|------------------------------------------------------------------------------|
| Wattage        | 30/40/60W                                                                    |
| IP Rating      | IP66                                                                         |
| IK Rating      | IK08                                                                         |
| Material       | High corrosion resistance die-cast copper-free aluminum body                 |
| Coating        | Polyester powder coating with phosphochromating pre-finish                   |
| Light source   | 1 x COB CRI>90                                                               |
| Screws         | Stainless steel                                                              |
| Transformer    | Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V) |
| Gasket         | Silicone rubber                                                              |
| Glass          | Tempered                                                                     |
| Power cable    | 0.5 mt. neoprene power cable included                                        |
| Gross weight   | 2.15 Kg                                                                      |
| Packaging size | 32*32*42cm 4PCS 8.6kg                                                        |

Option

