




ROSE

LT-SLBOLLARD LIGHT 1.0

Small bollards for private gardens with various sizes and angles to choose from.

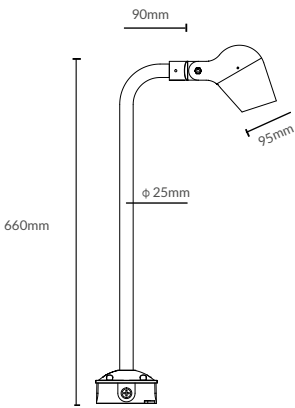

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
7W COB	700.0	100.0	15° 24° 36° 60° 40°-70°
2700/4000/5000K CCT available on request			

Finish color options :

- Textured Grey
RAL 9006
- Anthracite Grey
RAL7024
- Matt Black
(onrequest)
- Bronze
RAL8019

Customizable in different finishing colors

Technical features

IP66

IK 08


CE

CB

5 YEARS

Technical data

Wattage	7W
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

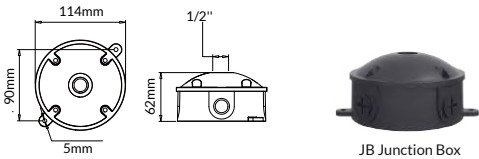

Extension arm

Material: Aluminum profile
Specification: Thickness 4mm, ϕ 25mm
*Length can be customized

