

DLW-LED-039



Head C





Head D



Base



Driver Installation

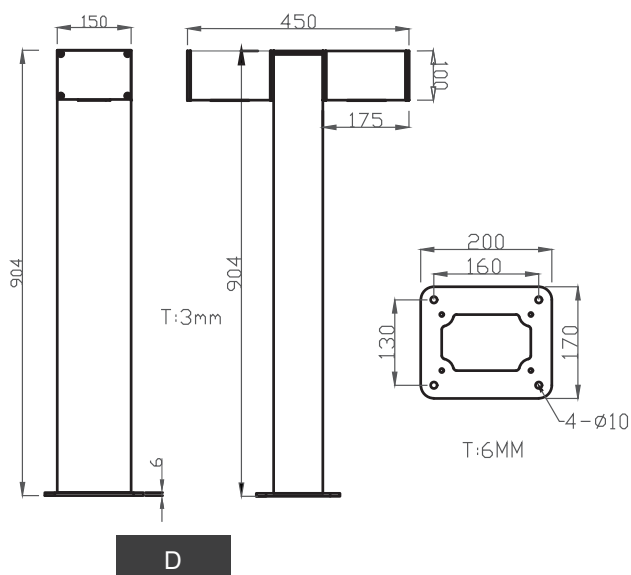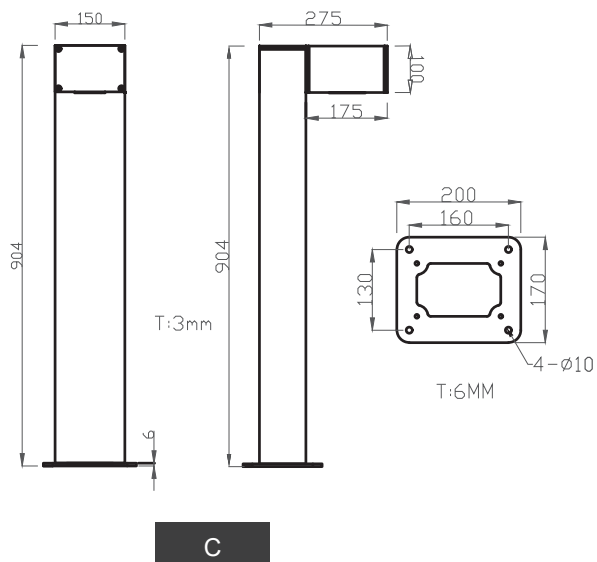

Application:



Walkways



Parks / Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

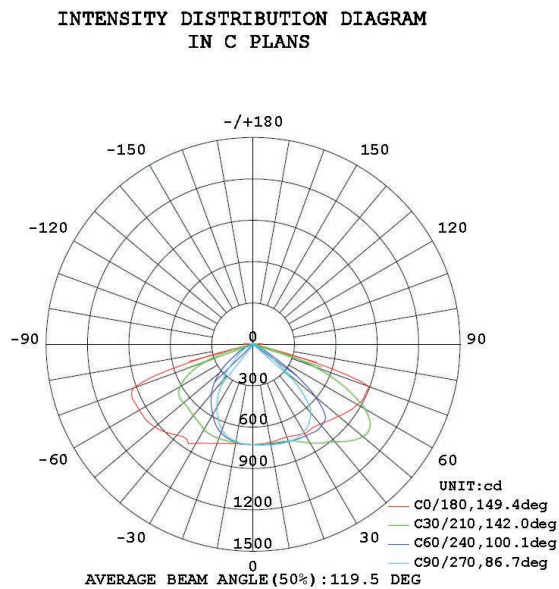

Features:

- Main body is made of Die casting aluminum and Extruded aluminum alloy.
- The diffuser is a clear anti-UV polycarbonate lens for high efficiency and vandal resistance.
- Lumileds 3030 led chip and Tridonic driver as regular, Sosen, Meanwell driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016o.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.
- Warranty is 3-5 years.

Specification:

Item No.	LED	Lumens	Wattage	CCT	CRI
DLW-LED-039C-10W	Lumileds 2835	1050LM	10W	2700-6500K	≥80
DLW-LED-039C-20W	Lumileds 2835	2100LM	20W	2700-6500K	≥80
DLW-LED-039C-25W	Lumileds 2835	2696LM	25W	2700-6500K	≥80
DLW-LED-039D-20W	Lumileds 2835	2520LM	20W	2700-6500K	≥80
DLW-LED-039D-25W	Lumileds 2835	3235LM	25W	2700-6500K	≥80