

LED FLOOD LIGHTS

Slim Series

FL-06-G7

140lm/W

NEW




Specification

Item	Power	Effi.	Leds	CRI	Weight	Beam Angle
FL10W-06-G7	10W	140lm/W	Lumileds	>80	0.85kg(1.87lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL20W-06-G7	20W	140lm/W	Lumileds	>80	0.85kg(1.87lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL30W-06-G7	30W	140lm/W	Lumileds	>80	0.85kg(1.87lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL50W-06-G7	50W	140lm/W	Lumileds	>80	1.52kg(3.35lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL80W-06-G7	80W	140lm/W	Lumileds	>80	1.52kg(3.35lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL100W-06-G7	100W	140lm/W	Lumileds	>80	3.70kg(8.16lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL150W-06-G7	150W	140lm/W	Lumileds	>80	3.70kg(8.16lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL200W-06-G7	200W	140lm/W	Lumileds	>80	4.82kg(10.6lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL240W-06-G7	240W	140lm/W	Lumileds	>80	4.82kg(10.6lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL300W-06-G7	300W	140lm/W	Lumileds	>80	10.4kg(22.9lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL400W-06-G7	400W	140lm/W	Lumileds	>80	10.4kg(22.9lbs)	15°/30°/60°/90°/150°/60*20°/156*71°
FL500W-06-G7	500W	140lm/W	Lumileds	>80	10.4kg(22.9lbs)	15°/30°/60°/90°/150°/60*20°/156*71°

(@200~240V Only)

Photometry

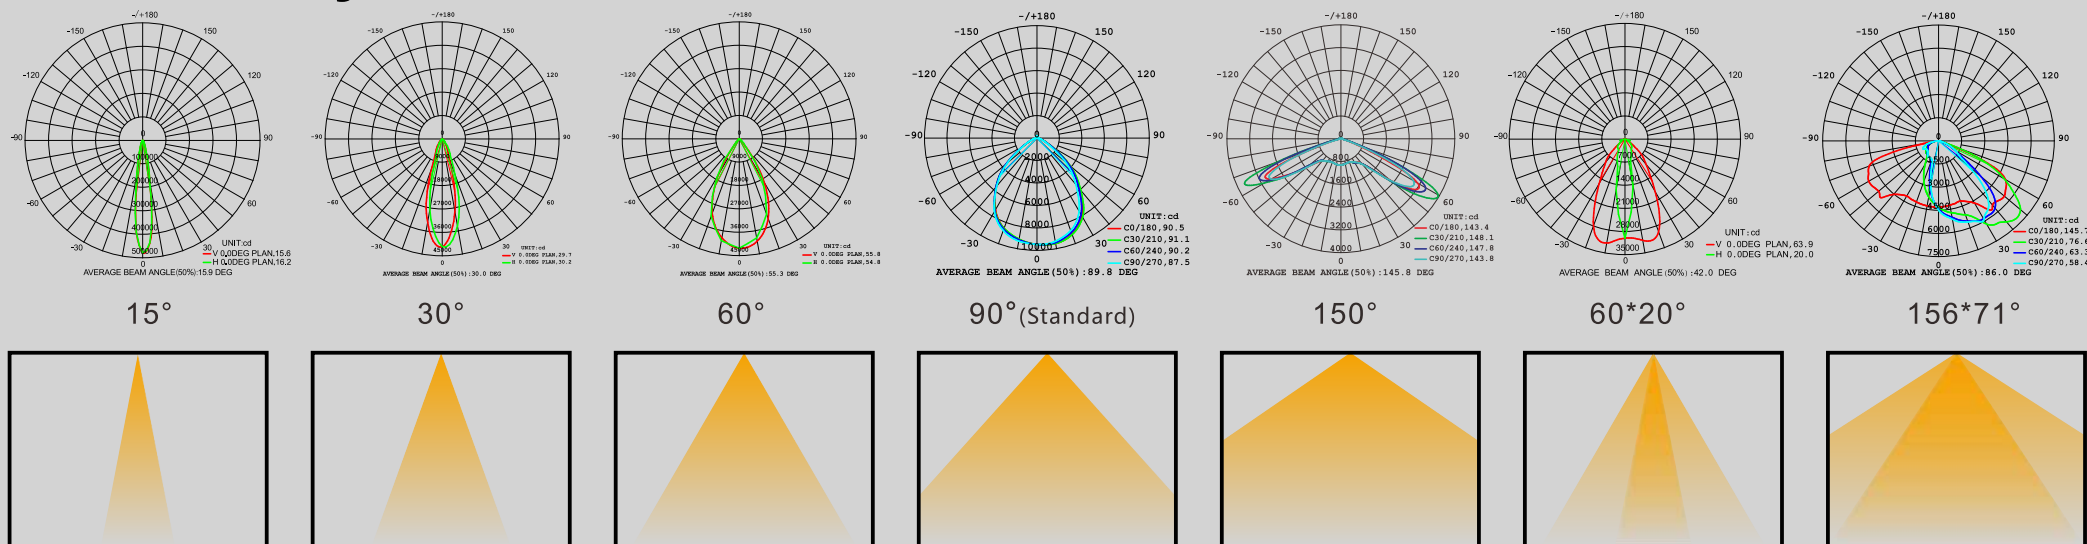

Model Options



10W/20W/30W



50W/80W



100W/150W




200W/240W




300W/400W/500W


Dimensions(mm)

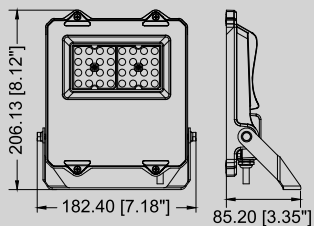


10W/20W/30W

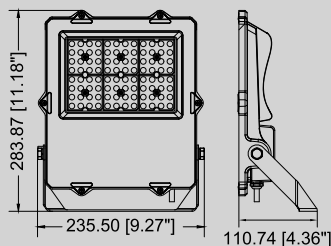


50W/80W

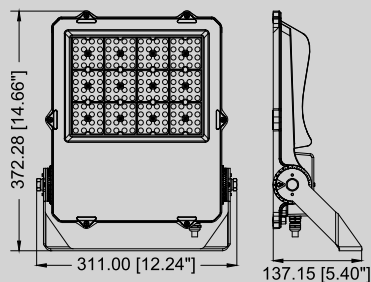

100W/150W

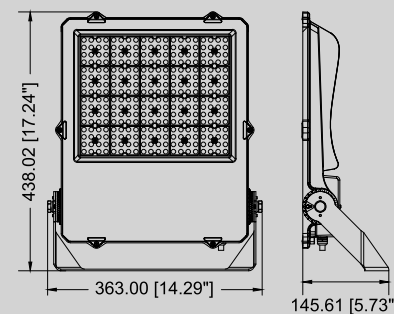

200W/240W

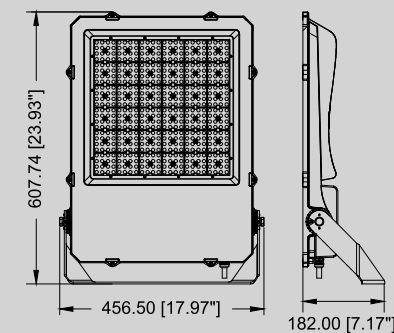

300W/400W/500W

Features

Alu. Recessed Clip

4mm Tempered Glass

>95% High Transmittance PC lens


High efficiency and Energy saving Leds

ADC12 Die-casting Aluminum Alloy Housing

Accurate calibration

Waterproof Quick Connector



SPCC Bracket

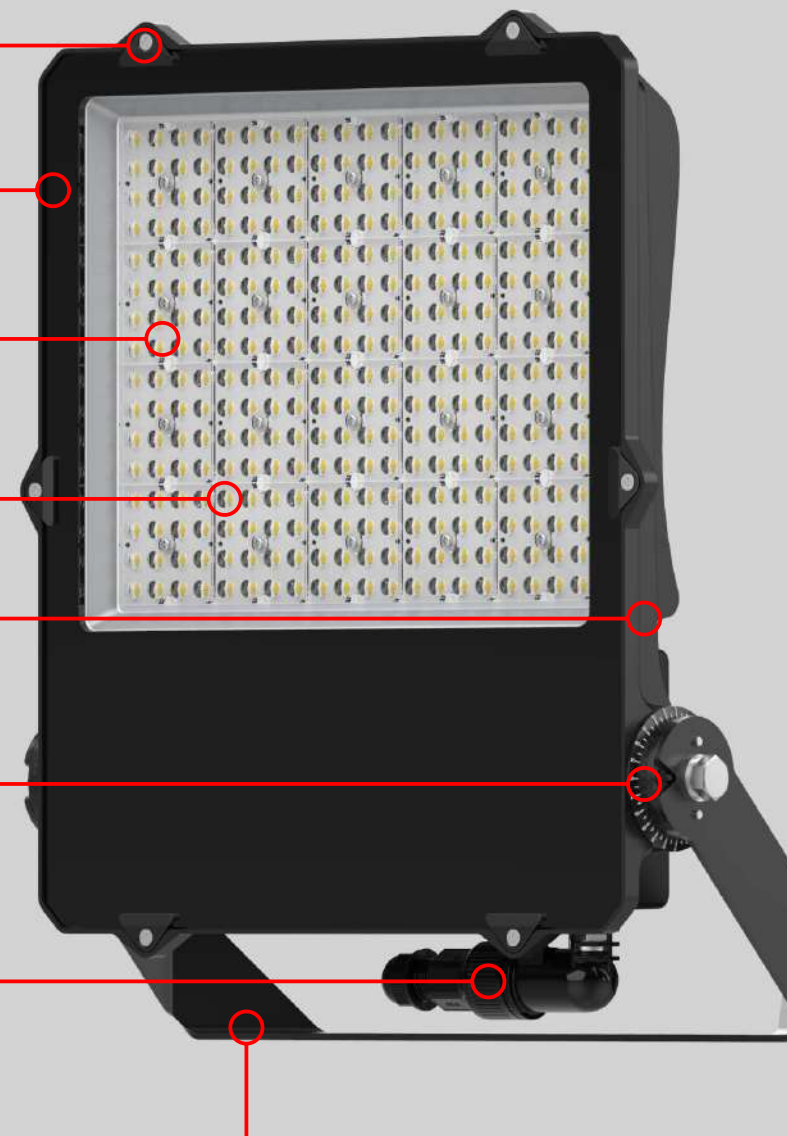

Waterproof Quick Connector (optional) (Only @50W-500W)



1. With this option, Fixture will come with IP66 Connector Ready, Just connect mains wire through and tighten.
2. Tool-less entry, easy and fast operation.
3. Inside Terminal with marked color of +/-GND, avoid false wiring.

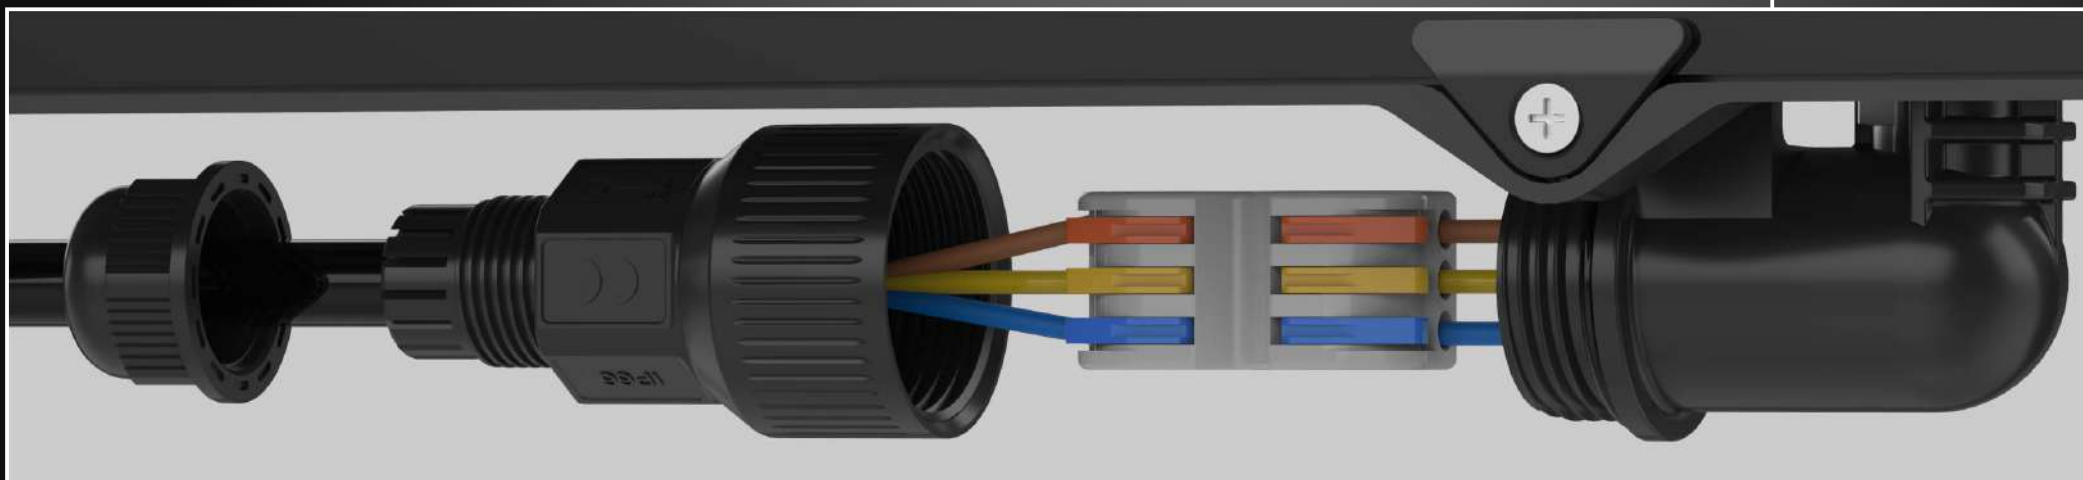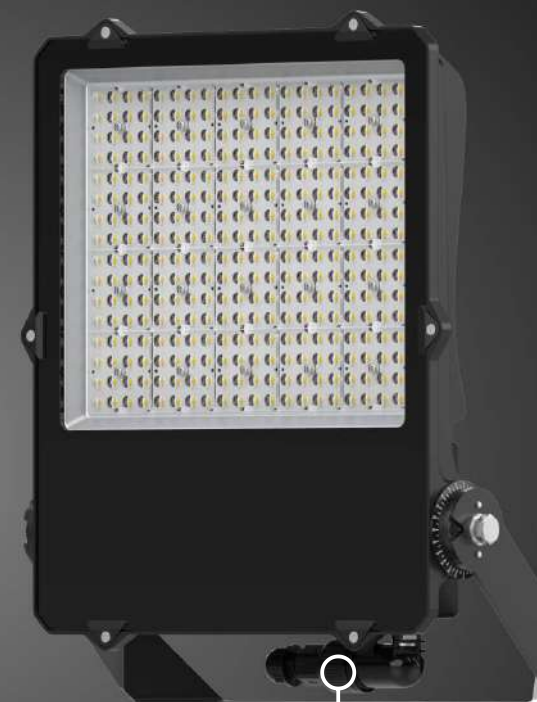


Waterproof

- ▶ Outdoor powder Paint,High rate corrosion resistance, suitable for harsh outdoor environment;
- ▶ With high purity Aluminum ADC12 die-casting ,it have high waterproof level and quality anti-corrosive ;
- ▶ Quality Waterproof Rubber;





Heatsink Running Waterproof Design

Running water
fast & clean

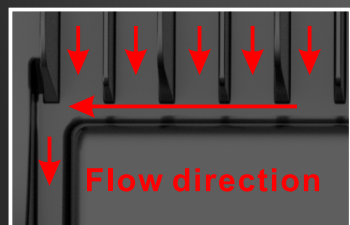


Running water fast & clean,
Helps to Extend Life

Customized
Logo(Options)

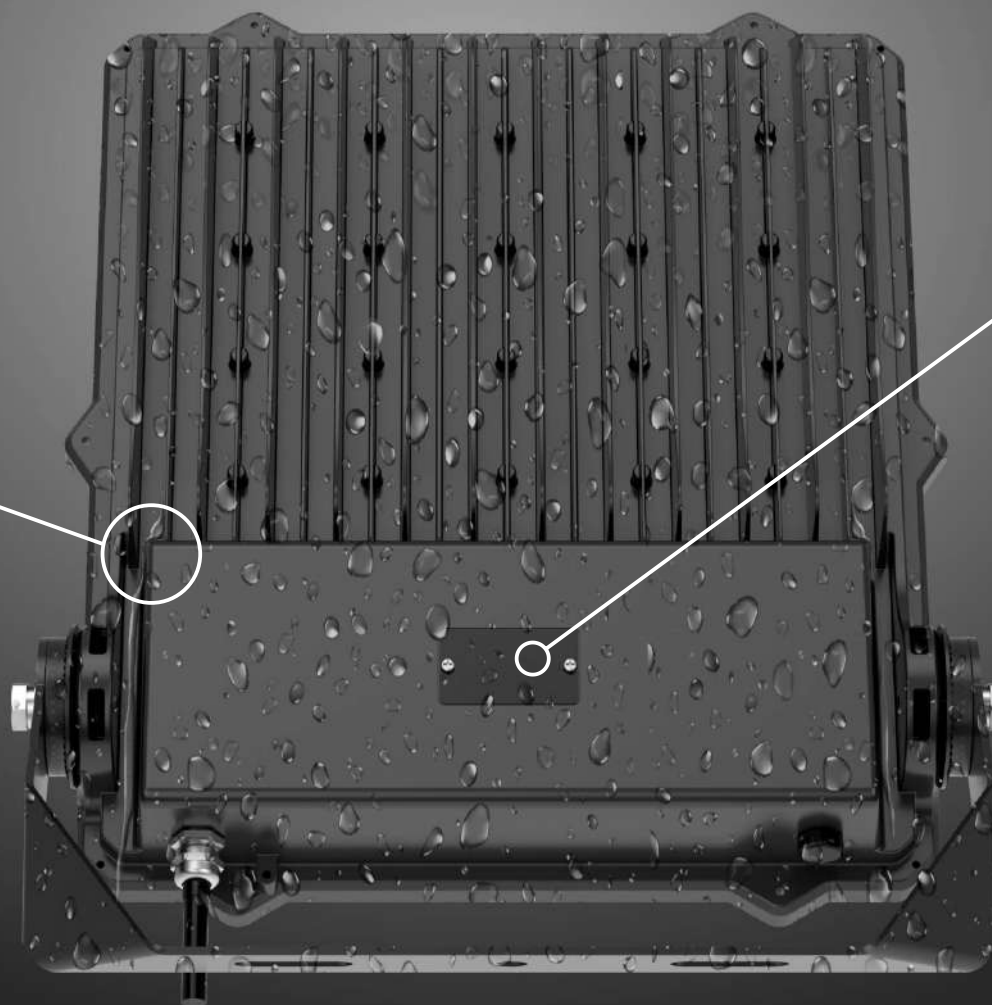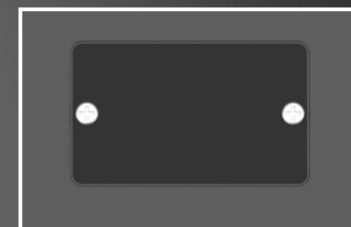

Perfect heatsink

- ▶ Perfect heat dissipation , die-casting aluminum body;
- ▶ Air convection design for high heat conductivity and quickly heat dissipation;
- ▶ Simple , High-end Patent Design.

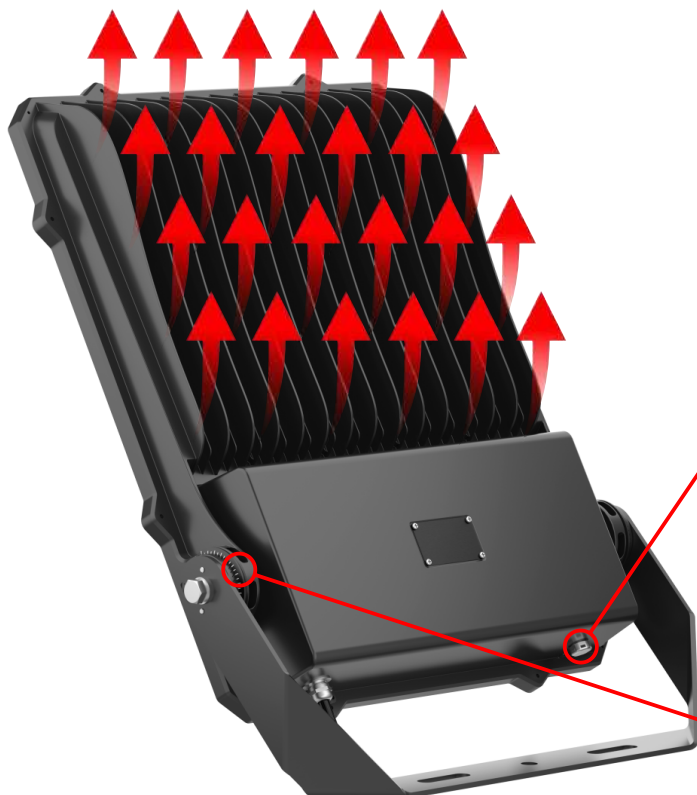

The breather function



- ▶ Maintains the pressure balance between the inside and outside;
- ▶ Eliminates fog, avoids condensation;
- ▶ Waterproof and dustproof protect;
- ▶ Less pressure inside the lamp to improve the use of LED lamp's life

Accurate calibration



Accurate Beam angle marking ,
make installation conveniently.